


# Bellman Magnetic switch BE9023

## Function

The BE9023 Bellman Magnetic switch consists of two parts; a Magnetic switch and a magnet. The Magnetic switch is open when near to the magnet and closes to form a contact when the magnet is moved away. The BE9023 is most suitable for use with the BE1123 Visit Telephone Transmitter to identify whether windows or doors, etc., are open.

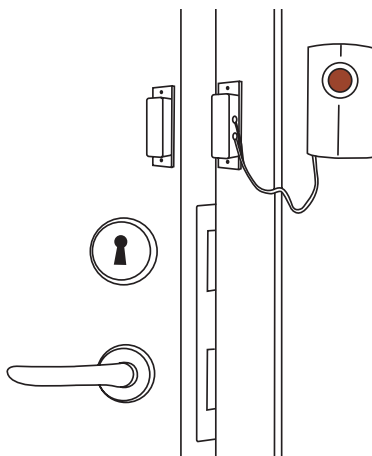

## Technical information

### Output signals

**Connector:** 3.5mm mono jack plug.

### Contact breaker

Close to magnet (max 1 cm): Open  
At least 2 cm from magnet: Closed

### Additional information

For indoor use only

**Dimensions WxHxD:** 25 x 62 x 13 mm

**Weight:** 25 g


**Colour:** White

**Flex length:** 0.5 m

# Bellman Door entering contact mat BE9024

## Function

The BE9024 Bellman Entry Monitor is a Door entering contact mat for indoor use. The BE9024 is most suitable for use with the BE1123 Bellman Visit Telephone Transmitter to identify whether a person is going in or out of a door, or has got out of bed, etc.

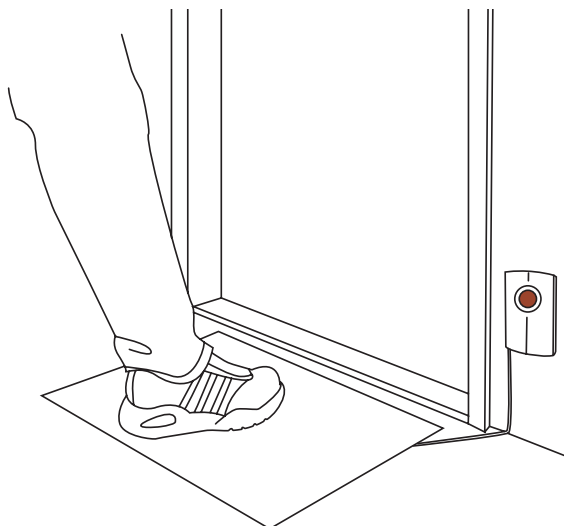

## Technical information

### Output signals

**Connector:** 3.5mm mono jack plug.

### Contact breaker

Longitudinal contact breaker

**Distance between contact breakers:** 9 cm.

**Without load:** Open

**With load:** Closed

**Load:** Contact made over 5mm  
with a point load of 5 kg

### Additional information

For indoor use only

**Dimensions WxHxD:** 745 x 420 x 3 mm

**Weight:** 675 g

**Colour:** Black

**Flex length:** 1.5 m