

HAUSMANN INDUSTRIES, INC.

Installation/Operation Instructions

Model 2188 - 4-Hook IV Pole

ASSEMBLY INSTRUCTIONS


- 1. Overlay top leg 'A' with pre-assembled pin 'F' over the corresponding holes in the middle of the bottom leg 'B'. Hammer the pin 'F' into the bottom leg and flush with the top leg.
- 2. Place lock washer 'D' onto bolt 'E' and install from the bottom side of the base into post 'C'.
- 3. Snap the hook 'G' over the top end of post 'C' until the snap pins pop through the two holes in the tube portion of the hook.

The product is now ready for use.

OPERATING INSTRUCTIONS

 Turn the screw type lock collar 'H' to lock and unlock the top post. Hold the top post with one hand while working the lock collar with the other hand.

The lock collar must be screwed tighter to hold heavier loads.

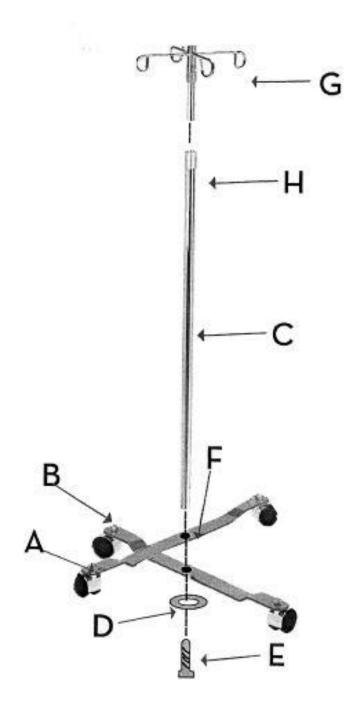



Please join Hausmann's effort to reduce paper use and keep the planet green by using our paperless Warranty Registration form. Visit www.hausmann.com and click on Warranty Registration. If you do not have web access or prefer the form be mailed or faxed to you, please call Hausmann Customer Service.

As of January 1, 2010, we will no longer include the paper based forms, please visit the online link to fill in your Warranty Form.

REV 011918 MH ©2018 HAUSMANN INDUSTRIES