





Extremely Fast and Light Stair Climbers for Loads up to 375 lbs.

- Lightweight aluminum construction and ergonomic design promote proper posture and reduce awkward movements by operator
- Takes only 1.5 hours to charge a totally discharged battery to 90%
- Sliding clutch and electronic overload protection
- Reduces force needed to move loads up and down stairs
- Curved-back frame for kegs and cylinders
- Power assist in climbing and descending modes
- Multiple ascent speeds
- Choose ergonomic or universal design handles



CLK110FNG4



- Ascending mode: constant green
- Descending mode: flashes green



- Depress once to change mode
- Depress longer (>3 sec.) to switch off

DUAL SPEED CONTROL



SPECIFICATIONS				
	CLK170EGS4	CLK140UWL4	CLK110FNG4	
Capacity	375 lbs.	300 lbs.	240 lbs.	
Maximum speed (steps per minute)	29	35	48	
Weight (without battery)	35 lbs.	35 lbs.	35 lbs.	
Maximum step height	8"	8"	8"	
Overall height	62"	60"	39-1/2" folded 57" unfolded	
Width	19"	19"	19"	
Depth	18" to 24" depending on nose	18" to 24" depending on nose	11-1/2" folded	
Battery capacity approximate steps (with maximum load)	220 steps	220 steps	220 steps	
Battery capacity approximate steps (with half-load)	300 steps	300 steps	300 steps	



HD UNIVERSAL HDL360U Heavy Duty, Versatile Stair Climbers for Loads up to 725 lbs.

HD UNIVERSAL WITH 4TH WHEEL ATTACHMENT HDL360U-4W

HD FOLD WITH 4TH WHEEL ATTACHMENT

HDL360F-4W

HD FOLD



- Single-step mode: constant green
- Continuous step mode: flashes green


SINGLE-STEP/CONTINUOUS STEP BUTTON

- Depress once to change mode
- Depress longer (>3 sec.) to switch off

DUAL SPEED CONTROL



STEP EDGE BRAKE SYSTEM GUARANTEES THE HIGHEST LEVEL OF SAFETY.

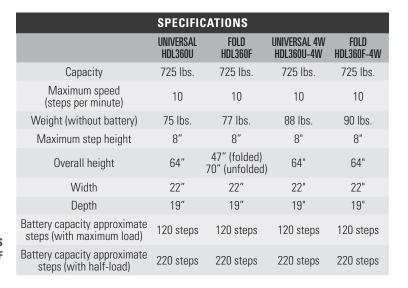

Options & Accessories



P/N	W"	D"	WT.(LBS.)
930030	18.8	9.4	4.0
930018	14	7	2.25
930003	16.5	13.4	4.0

Grooved nose plate with beveled edge slides easily under loads. Not compatible with HD models.



P/N	W"	D"	WT.(LBS.)
930085	17.7	7.5	4.0
930084	18.8	9.4	5.0

Solid nose plate with beveled edge slides easily under loads. Not compatible with

WHEELS



10" 4-ply tubed pneumatic wheel with precision bearings. Not compatible with HD models.



10" non-marking microcellular, puncture-proof wheel with precision bearings. Not compatible with HD models.

ACCESSORIES



930140 Clip Only 0.5 Battery securing clip holds the battery firmly in place in high impact situations.



P/N	WT.(LBS.)
930114	2.0
In-transit DC battery charger	

conveniently charges using the



P/N	Ľ"	W"	WT.(LBS.)
930123	138	2	1.0
930156	165	2	1.25

Heavy duty containment straps hold product in place during transport.



during delivery. Not compatible with HD models.

FASTER, SAFER DELIVERIES ON STAIRS

vehicle's lighter.









